


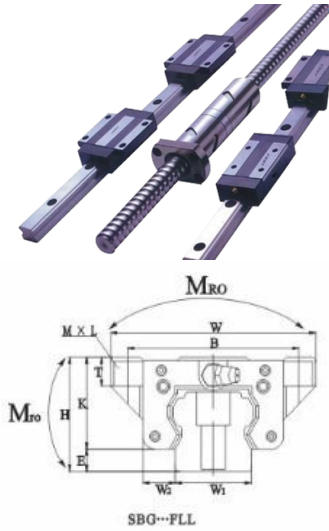

|                                |          |
|--------------------------------|----------|
| Type :                         | SBG25FLL |
| Mounting Dimensions            |          |
| Height(H) :                    | 36       |
| E :                            | 5.2      |
| W2 :                           | 23.3     |
| Width(W) :                     | 70       |
| Length(L) :                    | 102.5    |
| Block Dimensions               |          |
| Mounting tab hole(B×J) :       | 57*45    |
| Mounting tab hole(M×L) :       | M8*16    |
| L1 :                           | 78.6     |
| J1 :                           | 16.8     |
| K :                            | 31.5     |
| T :                            | 10       |
| Nipple Mounting Hole :         | M6*0.75  |
| Nipple(T1) :                   | 5.95     |
| Nipple(N) :                    | 12       |
| Rail Size                      |          |
| Width(W1) :                    | 23       |
| Height(H1) :                   | 21.8     |
| Pitch(F) :                     | 60       |
| Bolt Hole(d×D×h) :             | 7*11*9   |
| G :                            | 20       |
| Max.length Of rail Lomax :     | 4480     |
| Load capacity                  |          |
| Dynamic C(kgf) :               | 2770     |
| Sationary Co(kgf) :            | 4680     |
| Stationary moment(kgf.M) MRO : | 48       |
| Stationary moment(kgf.M) MPO : | 54       |
| Stationary moment(kgf.M) MRO : | 53       |
| Weight                         |          |
| bearing (kgf) :                | 0.81     |
| rail (kgf/M) :                 | 3.14     |